



**Europäisches
Patentamt**

**Eur pean
Patent Office**

**Office eur péen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00309011.5

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE, 05/04/01
LA HAYE, LE

This Page Blank (uspto)



Eur päisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 d r Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 00309011.5

Anmeldetag:
Date of filing: 13/10/00
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Unilever N.V.
3130 AC Vlaardingen
NETHERLANDS

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:

Method and apparatus for generating water sprays, and methods of cleaning using water sprays

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

B05B7/04, B08B3/02

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

This Page Blank (uspto)

METHOD AND APPARATUS FOR GENERATING WATER SPRAYS, AND
METHODS OF CLEANING USING WATER SPRAYS

5 Field of the Invention

This invention relates to a method of generating a water spray, to a method of cleaning a hard surface using such a spray and to water spray apparatus for use particularly in cleaning of hard surfaces.

10

Description of the Prior Art

Water sprays are used for the cleaning of hard surfaces, such as the exterior surface of vehicles and in the cleaning of interior walls, ceilings and floors of buildings, for example in food manufacturing and processing plants where soil of biological material becomes adhered to the walls. Pressurised water is ejected from a nozzle as a spray, for example a spray of fan shape, and directed at the surface to be cleaned.

15 The water droplets of the spray achieve their effect by erosion of the soil on the surface being cleaned. The kinetic energy or momentum of the water droplets dislodges the soil particles.

20 Air drag on the droplets of the spray reduce their velocity significantly over distances such as 1 or 2 metres, reducing the cleaning effect. To counteract this, it has been practised to increase the pressure of the water supplied to the nozzle, to increase the velocity of the emerging water. While this generates a

25 high velocity, it involves extra cost and environmental

30

problems, and results in formation of droplets of smaller size, which the present inventors believe have a lesser cleaning power on typical surface soils.

In the context of the present invention, it is mentioned that it is also known to use air to atomize the liquid emerging from spray nozzles. One form of such nozzle is an internal air assist nozzle where air is introduced into the liquid stream within a mixing chamber within the body of the nozzle. Another example is an external air assist nozzle where high velocity air impinges on the liquid as it emerges from the nozzle aperture, so as to atomize the liquid. The aim with such an air assist nozzle is to produce generally a spray of low velocity and fine droplets, e.g. less than 50 μ m diameter, e.g. for the formation of fogs or mists. Examples of such processes, not limited to the spraying of water, are in fuel combustion, cooling and chemical processing. Air assist spray nozzles can offer a wide range of spray patterns, flow rates and degree of atomisation.

EP-A-294690 describes an atomiser for cleaning liquid, particularly water, for use in the electronics and computer industries to obtain ultra clean surfaces. The aim is to achieve a high degree of atomisation of the water. The cleaning liquid is injected into a tube, which is carrying a flow of pressurised gas. The velocity of the gas is high, approaching sonic velocity within the tube. This atomises the liquid flow and accelerates the liquid droplets to a high velocity, which is said to be at least equal to half that of the

air. The ratio of liquid to gas flow rate is less than 1/1000, and low liquid flow rates of less than 30ml/minute are envisaged. At the impact with the surface being cleaned, air velocity in excess of 300m/s and liquid droplet velocity in excess of 150m/s are mentioned. Such a nozzle is not useful for the cleaning of large areas, such as building surfaces, because of the high air velocity and low liquid volume.

10 Summary of the Invention

The object of the invention is to provide a method of generating sprays, particularly for cleaning of hard surfaces, and apparatus for use in the method, by which improved cleaning performance is obtained.

15 The present inventors, noting that all sprays break into droplets soon after emergence from the nozzle into the external air, believe that adequate attention has not been paid to the generation of water droplets in a water spray, especially in the context of cleaning of surfaces.

20 According to the invention in one aspect there is provided a method of generating a water spray comprising ejecting water under pressure from a nozzle opening to form a water stream and providing a gas flow alongside the ejected water stream travelling in generally the same direction the relative velocities of the water stream and the gas flow being such that, at a distance of 1m from the nozzle opening the volume median diameter of the water droplets is in the range of 0.5 to 2mm.

30 Preferably the ratio of the velocity of the gas

flow to the velocity of the water stream immediately downstream of the nozzle opening is in the range 0.5 to 2.

5 In contrast with the prior art methods described above, the present inventors believe that, for improvement of cleaning effect, in particular soil removal from hard surfaces, the size of the particles produced should be carefully controlled, and in particular should be controlled to within the relatively
10 large size range 0.5 to 2mm. In the invention in this aspect, the gas flow which is provided around the emerging water stream, which for cleaning purposes will typically be an air flow, is selected to have a velocity rate, relative to the water stream, such that water
15 droplets of the desired dimensions are produced, and has a second effect of maintaining the velocity of the water droplets towards the target surface. Consequently, the relatively large droplets arriving at the cleaning surface have a high cleaning power, due to their
20 considerable momentum. The use of high water pressure in the nozzle, which had previously been thought necessary to enhance cleaning power, can be avoided. The provision of the air flow not only entrains the water droplets towards the surface being cleaned, but
25 also, as mentioned, controls the formation of the droplets, and reduces the tendency of the surrounding air to atomise the droplets, as is the case when a high pressure water stream emerges from a nozzle into still air.

30 According to the invention in another aspect there

is provided a method of generating a water spray comprising ejecting water under pressure from a nozzle opening to form a water stream and providing a gas flow alongside the ejected water stream travelling in
5 generally the same direction, the ratio of the velocity of the air flow to the velocity of the water stream immediately downstream of the nozzle opening being in the range 0.5 to 2.

Preferably the ratio of the velocities of the gas
10 flow and the water stream immediately downstream with the nozzle opening are in the range 0.75 to 1.5, more preferably 0.8 to 1.2.

The volumetric ratio of the gas flow to the water stream (expressed as volume/s) is preferably at least
15 100, and more preferably at least 200. In principle there is no upper limit on this ratio, since a larger gas flow volume at an appropriate velocity does not have a disadvantageous effect, except on the cost of producing the gas flow. Preferably the value of this
20 ratio is not more than 600 since a larger gas volume is unlikely to provide any benefit. In this specification, gas volumes are expressed at normal temperature and pressure.

Water droplet size is measured as VMD, which is
25 volume median diameter. The volume median diameter at 1m from the nozzle opening is preferably in the range 0.5 to 1.5mm, and is more preferably greater than 1mm, e.g. at least 1.02mm. The average water droplet velocity at 1m from the nozzle opening is preferably not
30 more than 35m/s, more preferably not more than 30 m/s.

The minimum velocity at 1m from the opening is preferably 15m/s, more preferably 20m/s.

Within the invention, high total water flow rates are envisaged. Preferably the water flow rate is in the
5 range 14 to 28 l/min. Because the spray produced has relatively large droplets, a high water flux (flow rate per unit cross sectional area) can be obtained.

The gas used for the gas flow in the invention will normally be air, in view of cost and convenience, but it
10 is possible to envisage applications of the invention when another gas is employed, e.g. a gas not containing oxygen such as nitrogen gas, for example if the spray is used for fire extinguishing.

According to the invention in another aspect there
15 is provided apparatus for generating a water spray, adapted and arranged for use in the method of the invention as described above.

In accordance with the invention in another aspect there is provided apparatus for generating a water
20 spray, having a water spray nozzle with an opening for the ejection of a water stream, means for providing a flow of pressurised water to the nozzle opening, an gas flow tube surrounding the nozzle opening and extending downstream thereof to an open end, and means for
25 providing a gas flow along the gas flow tube alongside the water stream ejected from the nozzle opening, wherein the ratio of the cross sectional areas of said opening of the nozzle and of the gas flow tube at the location of the nozzle is in the range 1/50 to 1/600,
30 preferably 1/100 to 1/400. The nozzle is preferably

capable of providing a flow rate of water of at least 14
1/min. The minimum internal cross sectional dimension
of the gas flow tube at the nozzle opening and
downstream thereof is preferably at least 30mm,
5 preferably at least 40mm. This dimension is the
internal diameter of the tube in the case of a circular
tube, but non-circular tubes may be employed, for
example elliptical tubes. The internal dimension of
the gas tube at the location of the nozzle opening is
10 preferably not more than 100mm. The length of the gas
flow tube downstream of the nozzle opening is preferably
in the range 1 to 3 times the average cross-sectional
dimension of the gas flow tube at the location of the
nozzle opening, more preferably in the range of 1 to 2
15 times this average cross-sectional dimension. In the
case of a circular gas flow tube, this average cross-
sectional dimension is the diameter. Downstream of the
water nozzle opening, the gas flow tube may be
converging or diverging, but preferably has a
20 substantially constant cross-sectional area. It is
desirable that the emerging water spray does not contact
the gas tube, but desirably the tube is as long as
possible.

The nozzle opening typically has a slit shape. It
25 is preferred in the invention that the spray produced
has a fan shape, i.e. has a long dimension and a short
dimension perpendicular to the long dimension, and
expands at least in the long dimension with increasing
distance from the nozzle opening.

30 Since the water spray generally expands after

emerging from the nozzle opening, the gas flow direction in the air tube is generally in the same direction as the water spray, e.g. parallel to an axis of the emerging water stream. The gas flow is preferably at least at opposite sides of the water spray and preferably substantially surrounds the water spray, as a gas shroud.

The invention is applicable to water sprays. The water preferably does not contain any solid particulate matter, but may contain quantities of solute material, e.g. less than 5% by weight.

In another aspect the invention provides a method of cleaning a hard surface comprising directing at the surface a water spray generated by the method of the invention. Preferably the hard surface is at a distance in the range 1 to 4m from the nozzle opening. The invention is especially applicable to the cleaning of soil, such as food soil, from hard surfaces, such as wall, ceiling and floor surfaces of a building.

Because the method of the invention can achieve better cleaning effects, the advantage of reduced water use can be achieved. Also good cleaning of large areas remote from the nozzle can be achieved quickly.

Introduction of the Drawings

A preferred embodiment of the apparatus of the present invention will now be described in further detail with reference to the accompanying drawing, in which:

Figure 1 is a cross-sectional view of the apparatus

according to the preferred embodiment;

Figure 2 shows an end view (a) and side view (b) of the preferred liquid nozzle incorporated in the apparatus of Figure 1; and

5 Figure 3 is a schematic cross-sectional view of the preferred apparatus of Figure 1, along arrow "A".

Preferred Embodiment and Examples

10 A preferred apparatus according to the invention as shown schematically in the drawing comprises a pneumatic air mover 4 comprising air inlet 20 and delivery conduit 12 of circular cross-section which surrounds the outlet end 7 of the cleaning water nozzle 6, which is in communication with the main water delivery pipe 8, into
15 which cleaning water is supplied through inlet 10 through a suitable conventional pressure inlet source (not shown). In the preferred embodiment the air mover 4 is a Model RJ50A Ringjet Airmover from O.N. Beck & Co Ltd, which is able to produce an air jet with a peak
20 exit velocity at the mouth 14 of about 25ms^{-1} . The water nozzle opening is slit-shaped. The nozzle 6, which is also of conventional design, was fitted to the commercially available air mover 4 by the inventors.

25 In this embodiment the delivery conduit 12 of the air mover 4 has an internal diameter of 67mm, the distance between the nozzle outlet end 7 and the mouth 14 of the delivery conduit 12 being approximately 120mm. The air supply is provided by compressed air at a pressure of up to 4.0 bar, although variation in the
30 outlet air velocity is possible by a adjustment of the

10

air mover setting.

Using the spray device of Figs. 1 to 3, air velocities, in the absence of water spray, were determined in dependence on the pressure of air supplied to the air mover 4. Velocity was measured at 100mm from the exit 14 by a vane anemometer. The result is shown in Table 1.

Table 1. Mean air velocities 100mm from air mover exit.

10

Air pressure, bar	Velocity, ms ⁻¹
1.0	11.0
1.5	12.5
2.0	15.0
2.5	17.0
3.0	19.0
3.5	20.5
4.0	22.5

15

20

25

Cleaning performance at two different water pressure and various air pressures was assessed by a standardised internal test of Unilever, in which an artificial protein soil, which is coated on stainless steel tiles and is very hard to remove, is partially removed by the spray.

The distances from the spray nozzle to the surface were 1m for tests designated with suffix A and 2m for tests designated with suffix B.

30

Water pressures, air pressure and % by weight removal of soil are given in Table 2.

It was noted that the spray angle (angular width of the spray) was narrowed or more focussed as a result of the air flow around the nozzle. This appears to cause the spray pattern to oscillate, so that it appears to have a wave or S-shape.

Table 2. Soil removal results

Test No.	Distance from nozzle (m)	Water pressure (bar)	Air pressure (bar)	Removal (wt%)
10 1B	2	20	0	31.29
2A	1	4.8	0	14.21
2B	2	4.8	0	19.47
15 3B	2	4.8	1	16.07
4B	2	4.8	2	31.40
20 5A	1	4.8	3	12.17
5B	2	4.8	3	22.89
6A	1	4.8	4	20.80
25 6B	2	4.8	4	24.37

These results show that with low water pressure (4.8 bar) and a surrounding air flow, good cleaning rates can be achieved and can be equivalent to that achieved with high pressure water (20 bar) without surrounding air flow. Where lower removal is achieved in this standard test, the water flow rate is much lower also, i.e. use of water is at least as efficient, and only low water pressure is required, with possible cost benefit.

Measurements were then made to obtain the mean values of air velocity and water velocity, using a Phase Doppler analyser. Measurements of velocity were taken at the centre of the spray, as the average in a cross-sectional area 7.5 x 7.5cm, at 1m and 2m from the nozzle. Also measured at the same locations was volume median diameter (VMD) of the droplets. The results are given in Table 3. Air pressure of zero means no air was flowing.

Table 3.

Test no.	1B	2A	2B	4B	5B	6A	6B
Distance of measurements from nozzle (m)	2	1	2	2	2	1	2
Water pressure (bar)	20	4.8	4.8	4.8	4.8	4.8	4.8
Air pressure (bar)	0	0	0	2	3	4	4
Water velocity (m/s)	25.7	22.7	17.9	19.8	21.1	26.9	20.9
Air velocity (m/s)	19.8	11.9	9.6	9.8	9.9	15.2	10.8
VMD (μ m)	337	950	1035	1041	1223	1303	1099

These results, when correlated with cleaning performance in Table 2, shows that the presence of large droplets, at about 1mm VMD, with velocity in the region 20m/s gives good cleaning performance at 2m from the spray nozzle.

CLAIMS

1. A method of generating a water spray comprising
ejecting water under pressure from a nozzle opening to
5 form a water stream and providing a gas flow alongside
the ejected water stream travelling in generally the
same direction, the relative velocities of the water
stream and the gas flow being such that, at a distance
of 1m from the nozzle opening the volume median diameter
10 of the water droplets is in the range of 0.5 to 2mm.
2. A method according to claim 1 wherein the ratio of
the velocity of the gas flow to the velocity of the
water stream immediately downstream of the nozzle
15 opening is in the range 0.5 to 2.
3. A method of generating a water spray comprising
ejecting water under pressure from a nozzle opening to
form a water stream and providing a gas flow alongside
20 the ejected water stream travelling in generally the
same direction, the ratio of the velocity of the gas
flow to the velocity of the water stream immediately
downstream of the nozzle opening being in the range 0.5
to 2.
- 25 4. A method according to claim 2 or 3 wherein said
velocity ratio is in the range of 0.75 to 1.5,
preferably 0.8 to 1.2.
- 30 5. A method according to any one of claims 1 to 4

wherein the volume median diameter of the water droplets at 1m from the nozzle opening is in the range 0.5 to 1.5mm.

- 5 6. A method according to any one of claims 1 to 5 wherein the average water droplet velocity at the centre of the spray at 1m from the nozzle opening is not more than 35m/s, preferably not more than 30m/s
- 10 7. A method according to any one of claim 1 to 6 wherein the average water droplet velocity at the centre of the spray at 1m from the nozzle opening is not less than 15m/s, preferably not less than 20m/s.
- 15 8. A method according to any one of claims 1 to 7 wherein the water flow rate is in the range 14 to 28 l/min.
- 20 9. A method according to any one of claims 1 to 8 wherein the volumetric ratio of the gas flow to the water stream is at least 100, preferably at least 200.
- 25 10. A method according to any one of claims 1 to 9 wherein the volumetric ratio of the gas flow to the water stream is not more than 600.
11. A method according to any one of claims 1 to 10 wherein the gas flow is an air flow.
- 30 12. A method of cleaning a hard surface comprising

15

directing at the surface a water spray generated by a method according to any one of claims 1 to 11.

13. Apparatus for generating a water spray, having a water spray nozzle with an opening for the ejection of a water stream, means for providing a flow of pressurised water to the nozzle opening, a gas flow tube surrounding the nozzle opening and extending downstream thereof to an open end, and means for providing a gas flow along the gas flow tube alongside the water stream ejected from the nozzle opening, wherein the ratio of the cross sectional areas of said opening of the nozzle and of the gas flow tube at the location of the nozzle is in the range $1/50$ to $1/600$, preferably $1/100$ to $1/400$.

15

14. Apparatus according to claim 13 adapted and arranged to provide a flow rate of water of at least 14 l/min .

15. Apparatus according to claim 13 or 14 wherein the minimum internal cross-section dimension of the gas flow tube at the nozzle opening and downstream thereof is at least 30mm, preferably at least 40mm.

16. Apparatus according to any one of claims 13 to 15 wherein length of the gas flow tube downstream of the nozzle opening is in the range 1 to 3 times the average cross-sectional dimension of the gas flow tube at the location of the nozzle opening.

30

16

17. Apparatus according to any one of claims 13 to 16 wherein the gas flow is an air flow.

ABSTRACT

METHOD AND APPARATUS FOR GENERATING WATER SPRAYS, AND
METHODS OF CLEANING USING WATER SPRAYS

5

A water spray has a nozzle (6) for carrying a
pressurised flow of water to an outlet (7) thereof, and
a conduit (12) surrounding the nozzle outlet (7) for
carrying a flow of gas contiguously around the flow of
10 cleaning liquid exiting said nozzle outlet (7). The
ratio of velocities of gas and water immediately
downstream of the nozzle is in the range 0.5 to 2. This
enables good control of water droplet size in the spray,
to a volume median diameter in the range 0.5 to 2mm at
15 1m from the nozzle. Low water pressures may be employed
in cleaning using such a spray.

This Page Blank (uspto)

1
/

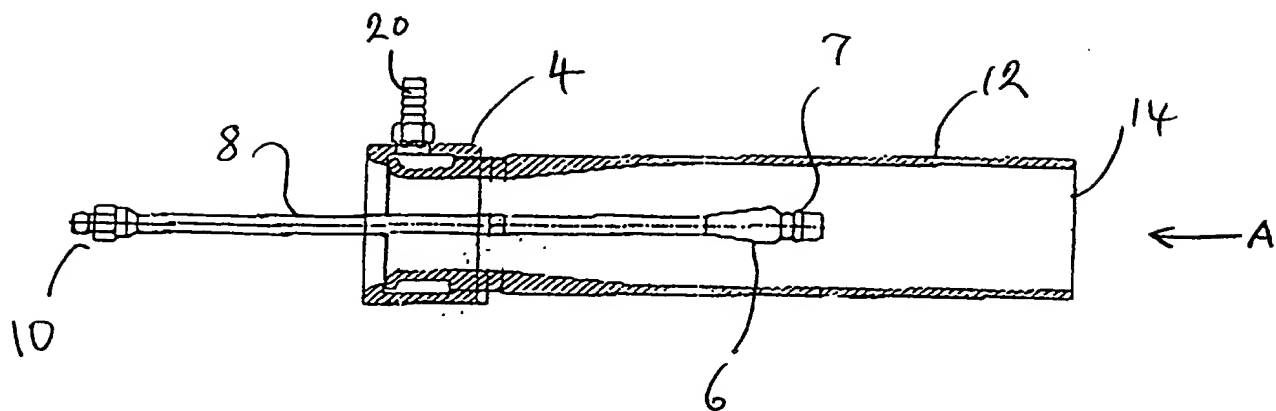


Fig. 1

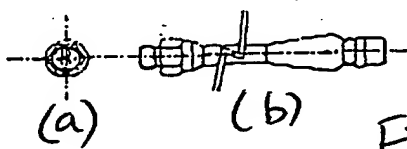


Fig. 2




Fig. 3

This Page Blank (uspto)